



Scheda Tecnica *Technical Sheet*

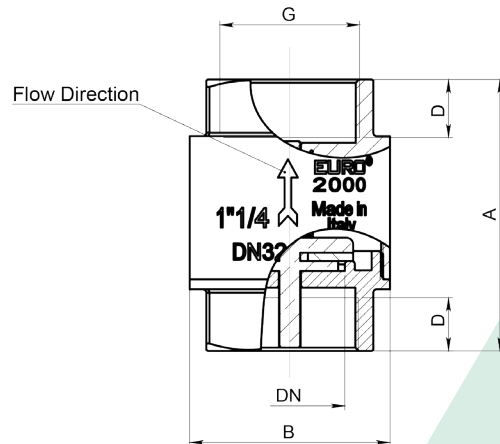

ART.0192	
<i>Spring check valve EURO2000 with brass insert</i>	
SPECIFICATION	
Series	0192
Thread ends	female: ISO 228/1
Orifice	from 15 to 100 mm
Actuator	-
Operator	-
APPLICATION	
Assembly in rigid pipe system	
Nominal pressure (PN) in bar: from 12 to 25	
KV: flowrate coefficient m ³ /h	
Direction of flow: only arrow direction	
Temperature range: -20 °C / +100°C	
Use: Water-Air	

N°	Descrizione	Description	Materials	Q.ty
1	Corpo	Body	CW617N	1
2	Otturatore	Stopper	CW614N	1
3	Guarnizione	Seal	NBR	1
4	Molla	Spring	STAINLESS STEEL 302	1
5	Manicotto	end connection	CW617N	1

NB. Misure: 2"1/2-3"-4" con filetto NPT a richiesta

Ulteriori caratteristiche:

Adatta all'impiego in impianti idrici, pneumatici, riscaldamento e di condizionamento. Può essere installata in (orizzontale, verticale e obliqua). Buona compatibilità con oli minerali, oli e grassi al silicone, idrocarburi alifatici mentre è sconsigliato il contatto con idrocarburi aromatici e clorurati, fluidi a base di glicole e solventi polari

Suitable for domestic water systems, air, heating and air conditioning. It can be installed in (horizontal, vertical and oblique). Good compatibility with mineral oils, silicone oils and greases, aliphatic hydrocarbons while it is not recommended for contact with aromatic and chlorinated hydrocarbons, glycol-based fluids and polar solvents

DN	G	A	B	D	PN
15	1/2"	58,5	34,5	11	25
20	3/4"	65	41,5	13	25
25	1"	74,5	48	16	25
32	1"1/4	83	60,5	18	18
40	1"1/2	93	71	21	18
50	2"	101	87	21	18
65	2"1/2	104	104	19	12
80	3"	113	125	21	12
100	4"	132	155	25	12

N° Disegno / Drawing Nr.	Misura / Size	BUGATTI[®] VALVOSANITARIA	UFFICIO TECNICO
0192	1/2"-4"		