
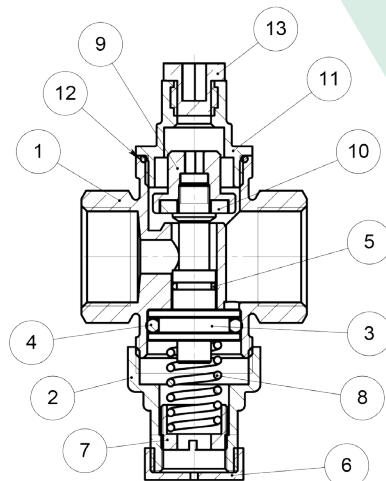
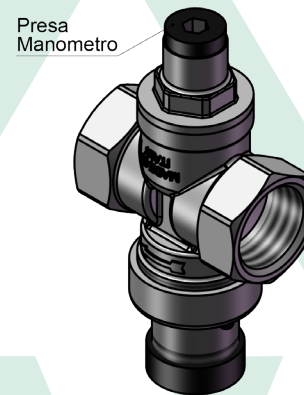


Scheda Tecnica *Technical Sheet*

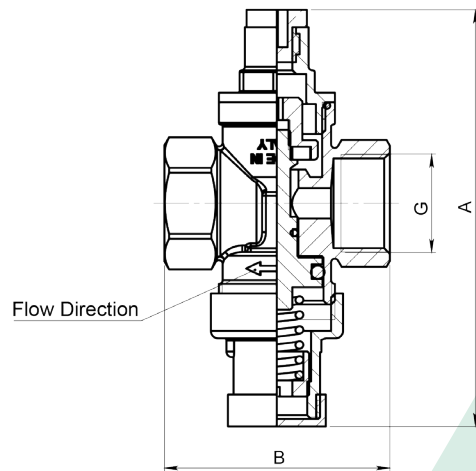

ART.977	
<i>Pressure reducer female-female Mignon, Mis. from 1/2" to 3/4"</i>	
SPECIFICATION	
Series	0977
Thread ends	Female-female: ISO 228/1
Orifice	-
Actuator	-
Operator	-
APPLICATION	
Assembly in rigid pipe system	
Nominal pressure (PN) in bar: 15	
KV: flowrate coefficient m ³ /h	
Direction of flow:	
Temperature range: 0°C/+80°C	
Use: Water and air	

N°	Descrizione	Description	Materials	Treatment	Q.ty
1	Corpo	Body	CW617N	Nickel-Plated	1
2	Tappo inferiore	Lower plug	CW617N	Nickel-Plated	1
3	Perno	Stem	CW614N		1
4	O-ring	O-ring	NBR70sh		1
5	O-ring	O-ring	NBR70sh		1
6	Tappo	Cap	Acetalic Resin		1
7	Porta molla	Spring holder	Acetalic Resin		1
8	Molla	Spring	AISI 430		1
9	Boccola	Brass ring	CW614N		1
10	Guarnizione	Seal	NBR70sh		1
11	Tappo superiore	Lower plug	CW617N	Nickel-Plated	1
12	O-ring	O-ring	NBR70sh		1
13	Tappino	Cap	Acetalic Resin		1

Condizioni di esercizio:
 Pressione massima in entrata: 15 bar
 Pressione in uscita regolabile min. 1 bar max 4 bar
 Sede di tenuta: Ottone CW617N
 Rapporto di riduzione: 5:1

Operating conditions:
 Maximum inlet pressure: 15 bar
 Adjustable outlet pressure min. 1 bar max 4 bar
 Sealing seat: Brass CW617N
 Reduction ratio: 5: 1

G	A	B	Portata ideale (L/min)	PN
1/2"	112	60	10-14	15
3/4"	113	60	12-16	15

N° Disegno / Drawing Nr.	Misura / Size	BUGATTI® VALVOSANITARIA	UFFICIO TECNICO
0977	3/8"-3/4"		